

Das geschidde Züg

GOMASTiT⁺®

merz+benteli ag



FireSeal MS 90 professional fire protection sealant from the Swiss manufacturer!!





Don't leave safety to chance, take it into your own hands

Gomastit FireSeal MS 90 is a flame-retardant elastic paint-compatible sealant adhering on many substrates and surfaces.

Gomastit FireSeal MS 90 meets the highest industry standards.

With this unlabelled sealant, fire protection joints can be created using conventional PU round cord. Tested for joint widths up to 50 mm. Gomastit FireSeal MS 90 is easy to use and has very low volume shrinkage.



Suitable for connection joints and housings, but also for fire barriers and fire covers.

Shore A hardness

Elongation at break

Tensile strength

Consistency

Processing Time

Complete curing after 24 hours

Total distortion

Volume change

Gomastit FireSeal MS 90

26

approx. 225 %

approx. 1.5 N/mm²

stable

max. 15 min.

≥ 3.0 mm

20 %

≤ 3 %



The technology that makes all the difference

Gomastit SMP products are based on the state of the art technologies and are manufactured from carefully selected raw materials.

They combine permanent elasticity, superior adhesion and maximum environmental compatibility

Advantages

- Easy to apply
- Permanently elastic
- Without the addition of solvents, isocyanates, silicones and phthalates
- Odourless
- Non-corrosive on surfaces
- Very wide adhesion range
- Paint-compatible
- Very low volume shrinkage

Tests


Gomastit FireSeal MS 90 has been tested by the independent FIRES S.R.O Institute in accordance with EN 1366-4 and classified according to EN 13501-2.

Test reports:


- FIRES-CR-023-AUPE "Linear Joint Seals" contains vertical wall and ceiling joints
- FIRES-CR-022-AUPW "Loadbearing Wall" contains horizontal wall joints
- VKF recognition No. 33083 and 32998, Fire resistance class EI 90
- Fire index 5.3
- ISO 11600-F20-HM
- Eco-bau 1. Priority ECO-BKP
- EMICODE EC1 Plus
- Eurofins IAC Gold

Schematic joint structure


Steel on aerated concrete on both sides

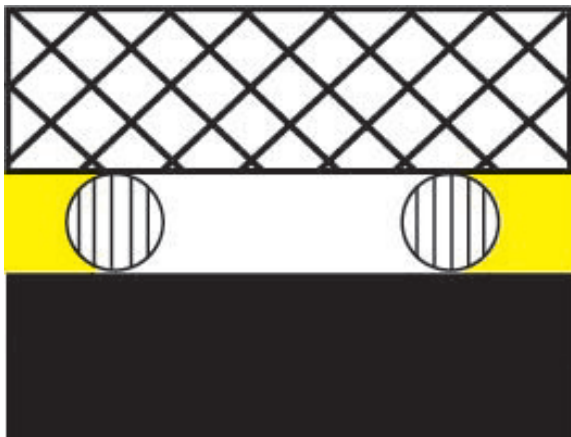


Aerated concrete on aerated concrete on both sides

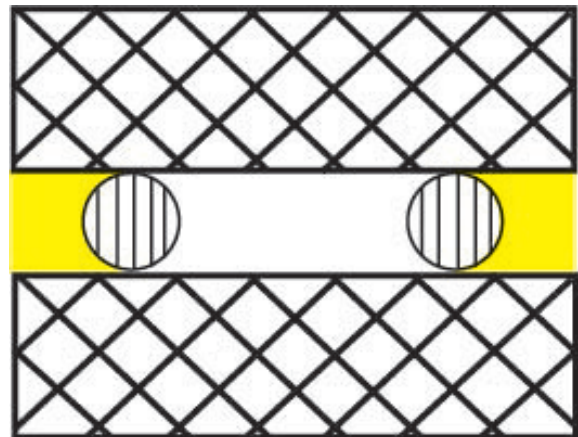

Steel on aerated concrete on one side

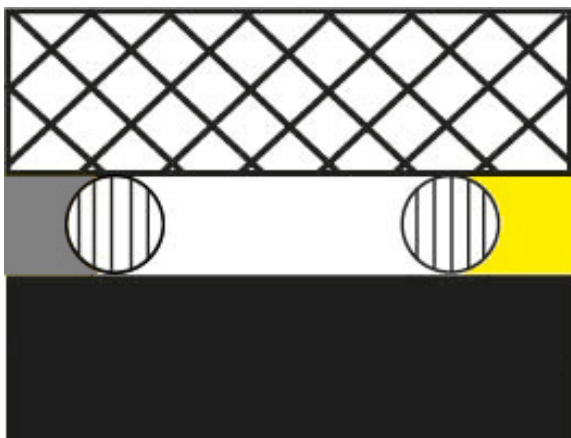

Aerated concrete on aerated concrete on one side

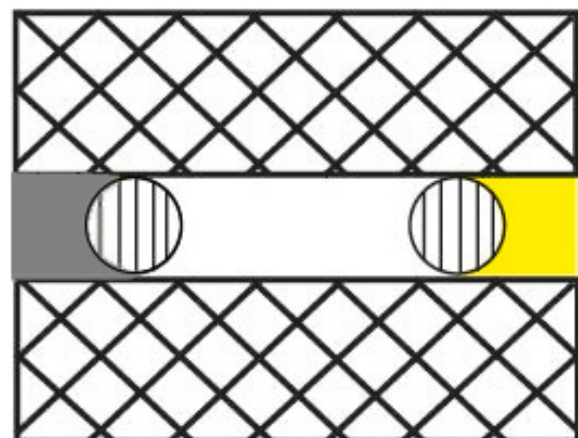

Steel



FireSeal MS90



PU round cord



Concrete




any sealant



Illustration of real-life example

Aerated concrete on aerated concrete

Steel on aerated concrete

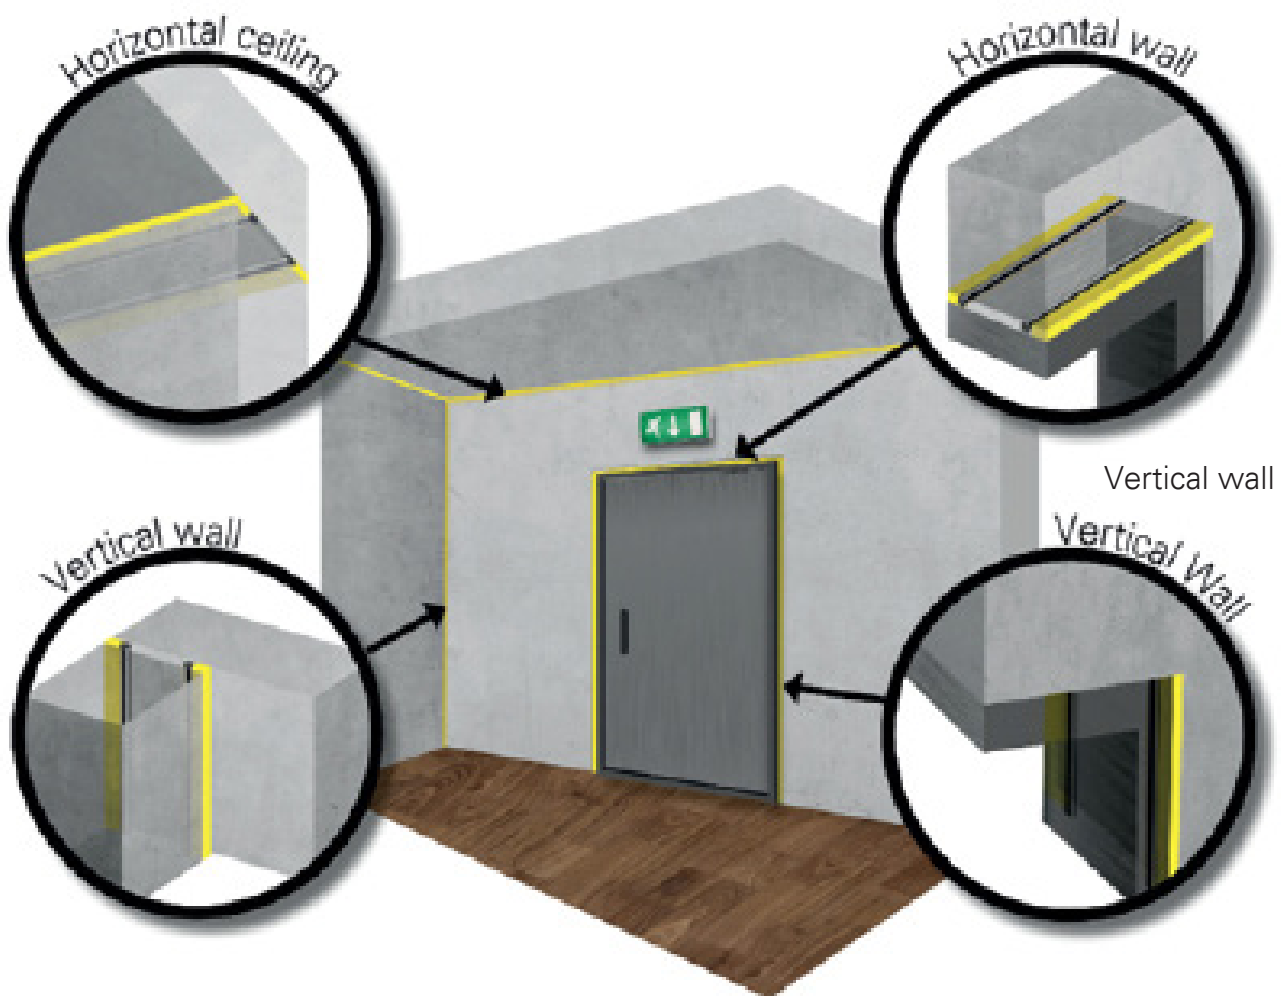

Also tested for single-sided sealing

Illustration of real-life example

Steel on aerated concrete - Building component min. 100 mm
Backfilled with normal open-celled PU round cord

Steel on aerated concrete	Double-sided	Orientation	Joint width (mm) up to ...	Joint depth (mm)	Fire resistance
		Horizontal ceiling Horizontal wall (A + C)	50	30	EI120
			50	15	EI60
			10	25	EI120
			10	15	EI90
		Vertical wall (B)	50	25	EI60
			50	15	EI45
	Single-sided	Orientation	Joint width (mm) up to ...	Joint depth (mm)	Fire resistance
		Horizontal ceiling Horizontal wall (A + C)	30	60	EI90
			30	30	EI45
		Vertical wall (B)	30	50	EI90
			30	30	EI45
			10	30	EI30

Aerated concrete on aerated concrete - Building component min. 100 mm
Backfilled with normal open-celled PU round cord

Aerated concrete on aerated concrete	Double-sided	Orientation	Joint width (mm) up to ...	Joint depth (mm)	Fire resistance
		Horizontal ceiling Horizontal wall (A + C)	50	30	EI180
			50	20	EI120
			50	10	EI45
			30	20	EI180
			30	15	EI90
			10	10	EI120
		Vertical wall (B)	50	25	EI120
			50	10	EI60
			30	15	EI90
	Single-sided	Orientation	Joint width (mm) up to ...	Joint depth (mm)	Fire resistance
		Horizontal ceiling Horizontal wall (A + C)	50	30	EI60
			50	20	EI30
			30	40	EI90
			30	25	EI60
			10	20	EI45
		Vertical wall (B)	30	40	EI90
			30	20	EI30
			10	20	EI45



merz+benteli ag

Freiburgstrasse 616
CH-3172 Niederwangen
Tel. +41 31 980 48 48
Fax +41 31 980 48 49
info@merz-benteli.ch
www.merz-benteli.ch

 **SWISS MADE**